


ELMAK[®]


ELMAK CRANE (SHANGHAI) CO.,LTD.

LUFFING TOWER CRANE

www.elmaktowercrane.com


EML5020-8(1.6m)

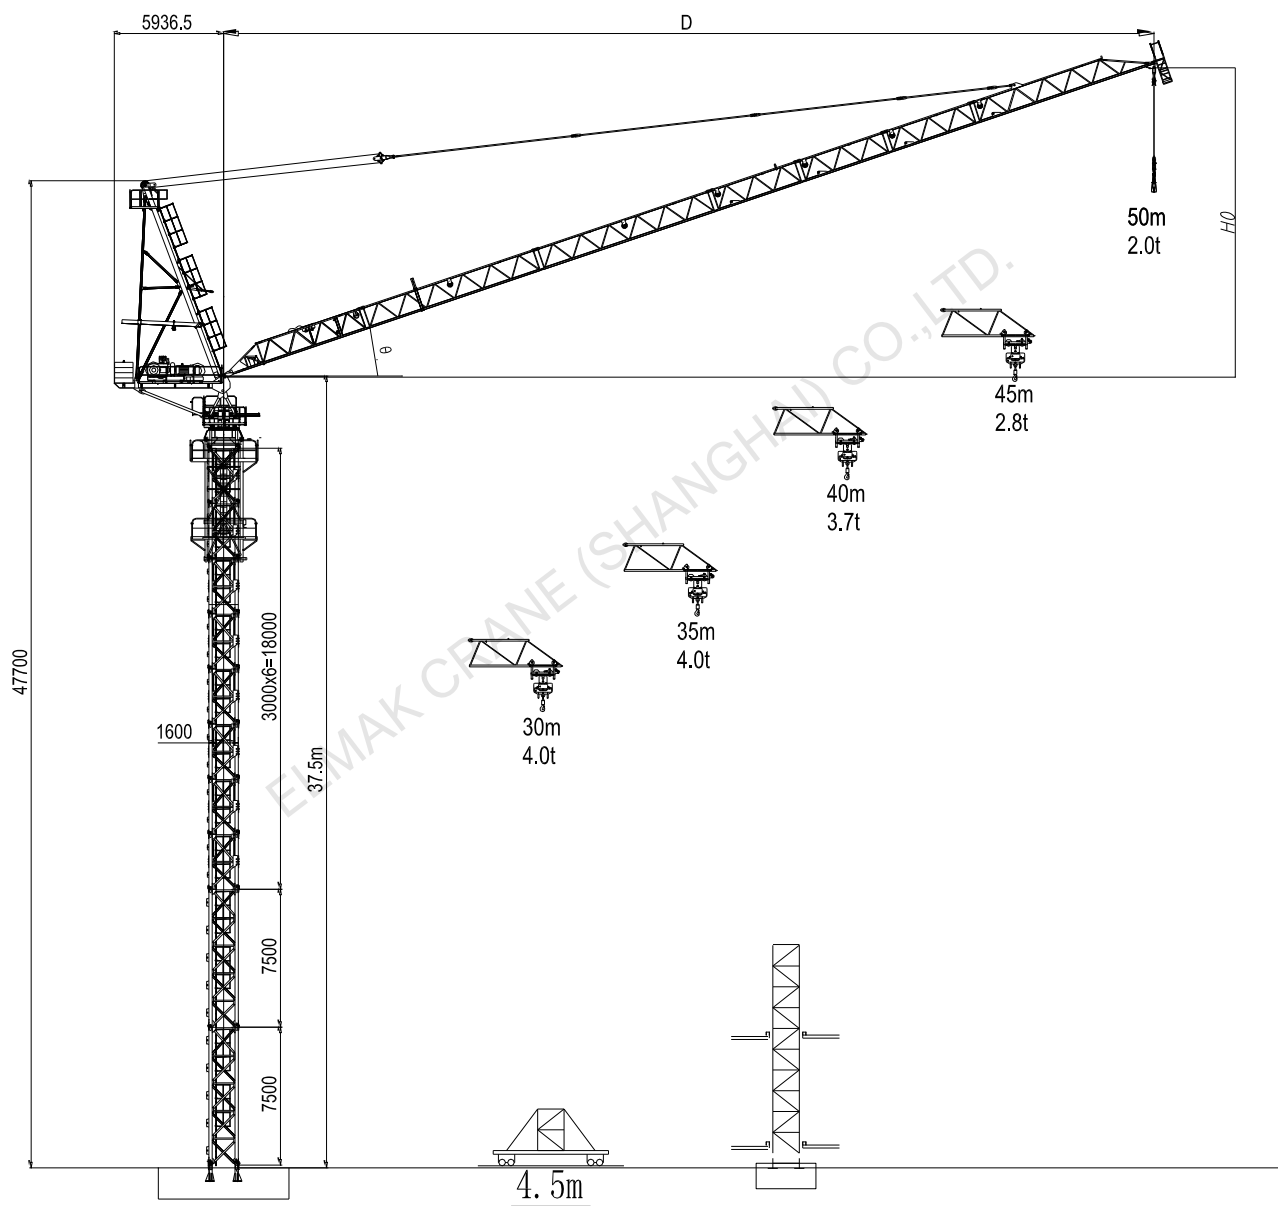

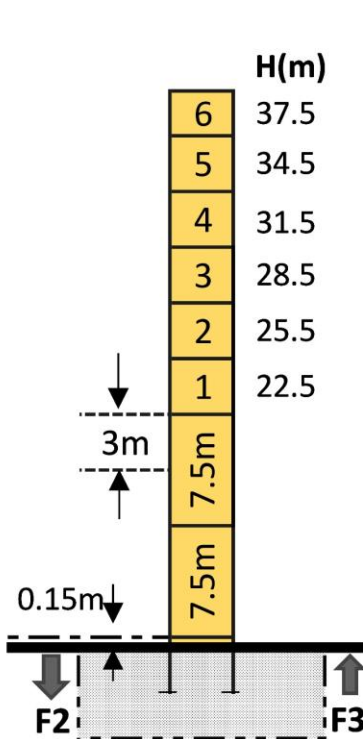
Mast-Reaction


		
F2	138.0t	190.0t
F3	108.0t	129.0t
	45.0t	

-  Total weight of free standing height(exclude counter weight ballast)
-  In service
- F** Reactions
-  Out of service

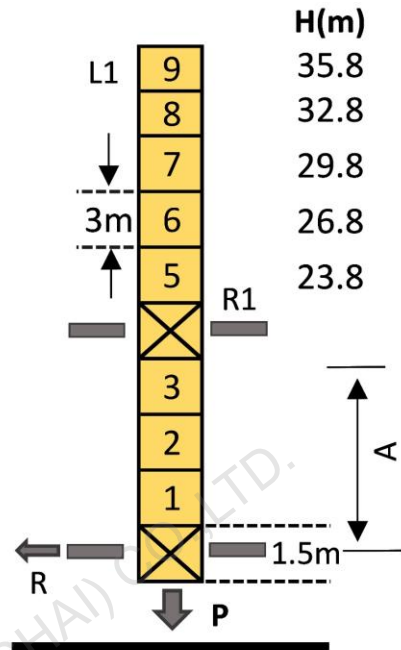


Amin	9m
Rmax	67t
Pmax	56t
	38.0t

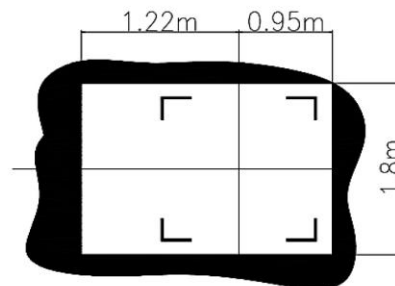

Loading Diagrams

	Fail	Max.load		10.0	15.0	20	25	30	35	40	45	50
		R(Cmax)	C(max)									
50m 	II	31.87	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.33	2.59	2.00
	III	24.13	6.00	6.00	6.00	6.00	6.00	5.42	4.17	3.23	2.49	1.90
45m 	II	35.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.54	2.80	
	III	30.00	6.00	6.00	6.00	6.00	6.00	6.00	4.38	3.44	2.70	
	IV	20.10	8.00	8.00	8.00	8.00	7.26	5.52	4.28	3.34	2.60	
40m 	II	35.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.70		
	III	25.00	6.00	6.00	6.00	6.00	6.00	5.77	4.53	3.60		
	IV	20.02	8.00	8.00	8.00	8.00	7.40	5.67	4.43	3.50		
35m 	II	35.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00			
	III	25.02	6.00	6.00	6.00	6.00	6.00	5.82	4.60			
	IV	20.00	8.00	8.00	8.00	8.00	7.41	5.72	4.50			
30m 	II	30.00	4.00	4.00	4.00	4.00	4.00	4.00				
	III	25.00	6.00	6.00	6.00	6.00	6.00	5.80				
	IV	20.01	8.00	8.00	8.00	8.00	7.35	5.70				

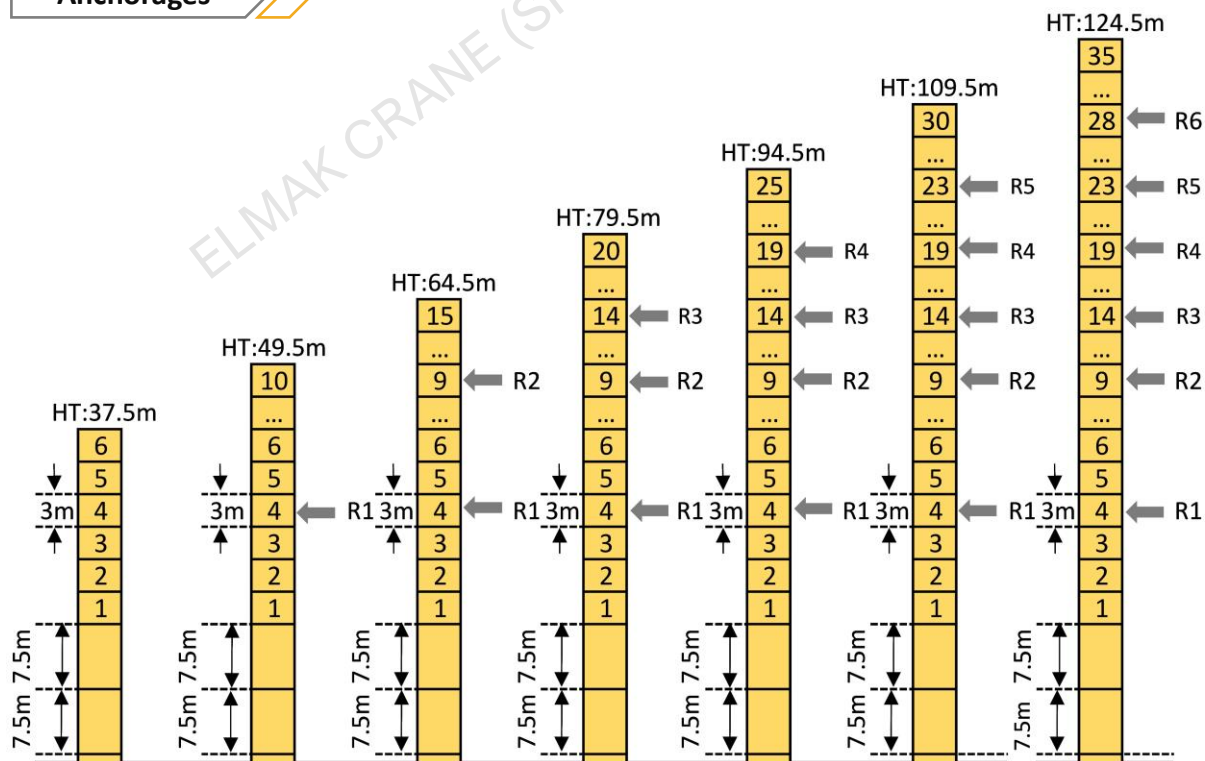Anchorage


Whole Machine Parameters

Jib Length(m)	Out Of Service			Angle Max			R max
	Anlge	D(m)	H0(m)	Anlge	D(m)	H0(m)	H0(m)
30	50°	20.0	19.6	85°	2.8	26.8	3.9
35	55°	20.8	25.5	85°	3.3	32.0	5.2
40	60°	20.8	31.7	85°	3.7	37.1	6.5
45	60°	23.4	36.1	85°	4.2	42.3	7.9
50	60°	25.9	40.8	85°	4.6	47.4	9.2

Counter Weight(t)

Counter Weight(t)					
Jib Length(m)	50	45	40	35	30
Counter Weight(t)	24	24.0	24.0	20	20

Mechanisms

Items	Mechanisms	Speed/Hoist weight						Rope Capacity	Motor (KW)
		M/min	t	M/min	t	M/min	t		
Hoisting	40QP20H	II		III		IV		600m	30
		9.00	4.00	6.75	6.00	4.50	8.00		
		22.50	4.00	16.80	6.00	11.50	8.00		
		45.00	4.00	33.70	6.00	522.50	8.00		
		67.50	3.00	50.60	4.50	37.50	6.00		
		90.00	2.00	67.50	3.00	45.00	4.00		
Luffing	50LP30H	≤2.2						290m	30
Slewing	RCV95(JH08)	0~0.8rpm							2*5.5
Travelling	RT324	12-24m/min							2*5.2/2.6
Main electrical components: Schneider (Frequency converter, Contactor,Relay)									